

UURATECH



Made in Canada



Utility Carts

Please contact your local distributor for more products
One stop shop for Utility Carts, Stainless Carts and
Heavy Duty Utility Carts starting from 700 lbs - 11000 lbs (4900 Kg)
Custom make carts are also available, please contact us for more information

Part No.: UTT – 501

Heavy Duty Mobility Cart – 11000 lbs (4900 Kgs)

Specifications:

- ⊙ Cart Capacity: 11000 lbs (4900 Kg)
- ⊙ Material: Aluminum – 6061
- ⊙ Top and bottom plate thickness: 0.500" (12.700 mm)
- ⊙ Dimensions: 32.000" x 60.000" x 34.000" (Height)
813.0 mm x 1524.0 mm x 864.0 mm (Height)
- ⊙ No of pillars between top and bottom plate: 6
- ⊙ Pillar Material: Aluminium
- ⊙ Pillar Dimensions: 3.000" x 3.000" x 20.500" (Height)
76.2 mm x 76.2 mm x 520.70 mm (Height)
- ⊙ Heavy Duty 10.0" Diameter (254 mm) Casters
- ⊙ 2 swivel with brakes and 2 rigid
- ⊙ Distance between plates: 20.50" (520.7 mm)
- ⊙ All Aluminum, Black Anodized

Product made by Aluminium



Assembled and ready to use

Part No.: UTT – 502

Medium Duty Utility Cart – 1250 lbs (567 Kgs)

Specifications:

- ⊙ Cold rolled steel, 16 gauge (0.063" Thick, 1.6 mm)
- ⊙ Cart Capacity: 1250 lbs (567 Kg)
- ⊙ Dimensions: 20.000" x 30.000" x 38.000" (Height)
508.0 mm x 762.0 mm x 966 mm (Height)
- ⊙ Double in tray in front for more space and tools
- ⊙ Formed L-Angle steel posts, E-coated (Black),
1.500" x 1.500" x 0.1875" Thickness
38.0 mm x 38.0 mm x 4.750 mm Thickness
- ⊙ 5.0" (127mm) diameter Casters, 2 swivel with brakes and 2 rigid
- ⊙ Trays: Black, Grey or Blue (Powder coated)
- ⊙ Distance between trays: 13.0" (330.0 mm)
- ⊙ Top and middle shelves can be installed lip up or down
- ⊙ Nylon inserted nuts to resist loosening

Part No.: UTT – 503

Welded Cart – 2000 lbs (908 Kg)

Specifications:

- ⊙ Cold rolled steel, 11 gauge (0.125" Thick, 3.175 mm)
- ⊙ Cart Capacity: 2000 lbs (908 Kg)
- ⊙ Dimensions: 24.000" x 36.000" x 40.000" (Height)
610.0 mm x 914.0 mm x 1016 mm (Height)
- ⊙ Formed L-Angle steel posts, E-coated (Black),
2.000" x 2.000" x 0.1875" Thickness
50.8 mm x 50.8 mm x 4.750 mm Thickness
- ⊙ 5.0" (127 mm) diameter Poly Urethane Casters,
2 swivel with brakes and 2 rigid, Grease nipple for ease movement
on casters, best suitable for warehouse and industry floors
- ⊙ Trays: Black, Grey or Blue (Powder coated)
- ⊙ Distance between trays: 18.0" (457.0 mm)
- ⊙ Top and middle shelves can be installed lip up or down



Welded Cart and ready to use

Part No.: UTT – 504

5 Shelf - Utility Cart – 1600 lbs (725 Kg)

Specifications:

- ⊙ Cold rolled steel, 16 gauge (0.063" Thick, 1.6 mm)
- ⊙ Cart Capacity: 1600 lbs (725 Kg)
- ⊙ Dimensions: 20.000" x 30.000" x 68.000" (Height)
508.0 mm x 762.0 mm x 1727 mm (Height)
- ⊙ Formed L-Angle steel posts, E-coated (Black),
1.500" x 1.500" x 0.1875" Thickness
38.0 mm x 38.0 mm x 4.750 mm Thickness
- ⊙ 5.0" (127 mm) Diameter Casters, 2 swivel with brakes and 2 rigid
- ⊙ Trays: Black, Grey or Blue (powder coated)
- ⊙ Distance between trays: 13.0" (330.0 mm)
- ⊙ Nylon inserted nuts to resist loosening



Assembled and ready to use



Assembled and ready to use

Part No.: UTT – 505

4 Shelf – Metal Rack

Specifications:

- ⊙ Cold rolled steel, 16 gauge (0.063" Thick, 1.6 mm)
- ⊙ Dimensions: 20.000" x 30.000" x 47.000" (Height)
508.0 mm x 762.0 mm x 1194 mm (Height)
- ⊙ Formed L-Angle steel posts, E-coated (Black),
1.500" x 1.500" x 0.1875" Thickness
38.0 mm x 38.0 mm x 4.750 mm Thickness
- ⊙ Trays: Black, Grey or Blue (Powder coated)
- ⊙ Distance between trays: 13.0" (330.0 mm)
- ⊙ Trays can be installed lip up or down
- ⊙ Nylon inserted nuts to resist loosening


STAINLESS STEEL CARTS

Part No.: UTT – 600

Hospital Use Mobile Cart

Specifications:

- ⦿ Material: Mirror Polished Stainless Steel (SS 304, Environmental friendly)
- ⦿ 16 Gauge, 0.063" Thick (1.6 mm)
- ⦿ 20.000" x 30.000" x 38.000" (Height)
508.0 mm x 762.0 mm x 965.0 mm (Height)
- ⦿ Protech, Thermo plastic rubber casters, double ball bearing
- ⦿ Top tray is ideal for gloves, bottles and blood test tubes
- ⦿ Easy to assemble in 6 steps

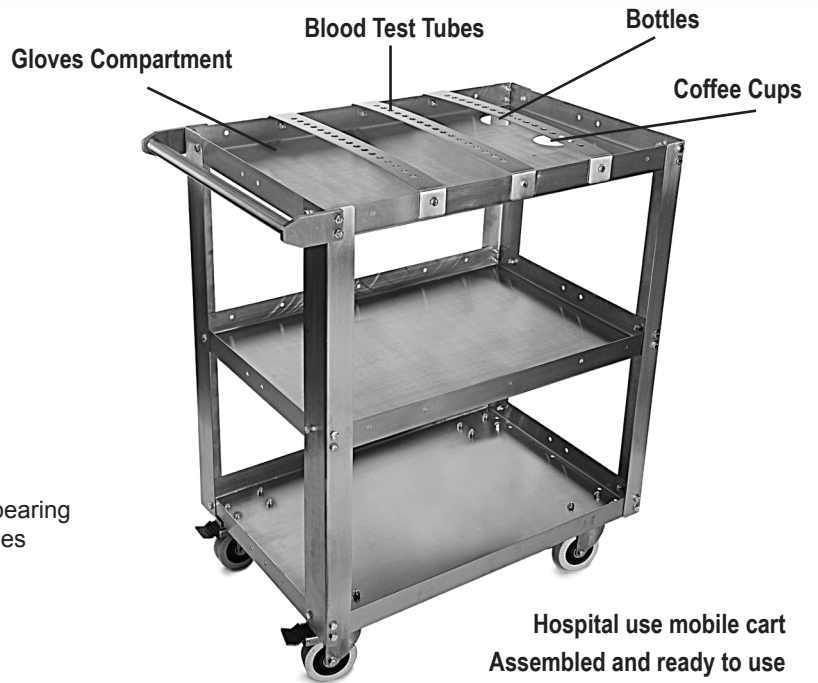

Hospital use mobile cart
Assembled and ready to use




Assembled and ready to use

Part No.: UTT – 601

Restaurant Use Mobile Cart

Specifications:

- ⦿ Material: Mirror Polished Stainless Steel (SS 304, Environmental friendly)
- ⦿ 16 Gauge, 0.063" Thick (1.6 mm)
- ⦿ 20.000" x 30.000" x 38.000" (Height)
508.0 mm x 762.0 mm x 965.0 mm (Height)
- ⦿ Protech, Thermo plastic rubber casters, double ball bearing,
- ⦿ Top tray is ideal for coffee cups, bottles and food items.
- ⦿ Easy to assemble in 6 steps,

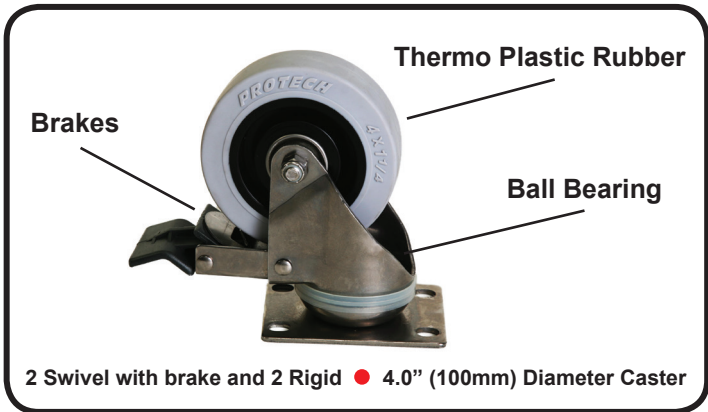

2 Swivel with brake and 2 Rigid ● 4.0" (100mm) Diameter Caster

IDEAL FOR OFFICE, HOSPITAL AND RESTAURANT

Non-marking ProTech treaded wheel is securely fastened to its polyolefin core. Highly resistant to most chemicals and excellent for all floor surfaces. Rust-proof, quiet and easy rolling, this wheel is shock absorbing and will reject floor debris.

Please contact us for custom make utility carts